



**NINGBO JIANGBEI RACING IMPORT & EXPORT CO.,LTD.**

Add:Room 906,No.796,Yaoai Road,Ningbo,China

Tel:+86-574-87703192

Fax:+86-574-87703892

E-mail:ashley@ningbo-racing.com

www.ningbo-racing.com



[www.ningbo-racing.com](http://www.ningbo-racing.com)

# Contents

## European Type Of Automatic Sewage Lifting Device

|        |    |
|--------|----|
| WL300A | 01 |
| WL450A | 02 |
| WL450C | 03 |
| WL550A | 04 |
| WL600A | 05 |
| WL600C | 06 |
| WL600E | 07 |
| WL750A | 08 |

## America Type Of Automatic Sewage Lifting Device

|        |    |
|--------|----|
| WL300B | 09 |
| WL450B | 10 |
| WL450D | 11 |
| WL600B | 12 |
| WL600D | 13 |
| WL600F | 14 |
| WL750B | 15 |
| WL900B | 16 |

## External Sewage Lifting Station

|        |    |
|--------|----|
| DMJ25  | 17 |
| DMJ50  | 19 |
| DMJ60  | 21 |
| DMJ90  | 23 |
| DMJ170 | 25 |
| DMJ460 | 27 |

## Automatic Sewage Lifting device

### Features

- Independent and reasonable appearance design
- Safety protection of high performance water and electricity separation
- Unique anti-winding protective structure
- Unique all-stainless steel movement in the industry
- Including a number of patented technologies
- High lift, large flow, low noise, strong function
- Stable performance, convenient maintenance and installation

## External Sewage Lifting Station

### Features

- Wide Range of Capacity Specifications: Available in various sizes to suit applications ranging from small residential basement bathrooms to large commercial and public venues.
- Durable & Eco-Friendly Material: The tankis constructed from corrosion-resistant, environmentally friendly Polyethylene (PE), ensuring excellent airtightness and long-term durability.
- Flexible Installation: Features multiple pre-formed inlet ports positioned in various directions to facilitate easy installation.

Dual-Control Safety System: Utilizes a unique dual-level control system combining pneumatic (air pressure) and float ball mechanisms for doubled protection during operation.






WL300A


SPECIFICATION

|                    |                |
|--------------------|----------------|
| Voltage            | 220V-240V 50HZ |
| Power consumption  | 300W           |
| Insulation Class   | F              |
| Speed              | 2850RPM        |
| Noise Level        | < 70db         |
| Enclosure Class    | IP54           |
| Sewage height(ON)  | 55mm           |
| Sewage height(OFF) | 25mm           |
| Max Flow           | 100(L/min)     |
| Max Lift           | 6.5M           |

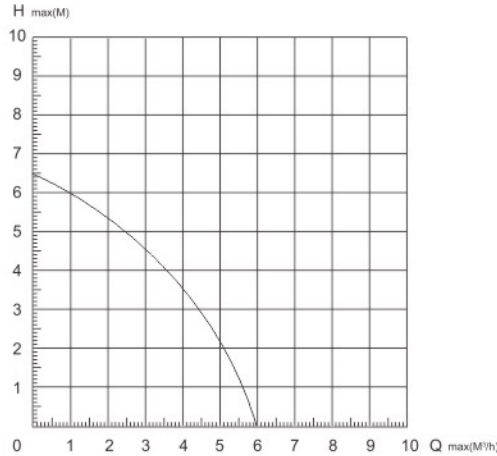

PACKAGE


|             |                |
|-------------|----------------|
| QTY/CTN     | 1 PCS/CTN      |
| G.W/N.W.    | 4.9 / 4 KGS    |
| CARTON SIZE | 36 X 24 X 20CM |
| 20GP        | 1766 PCS       |
| 40GP        | 3656 PCS       |
| 40HQ        | 4127 PCS       |

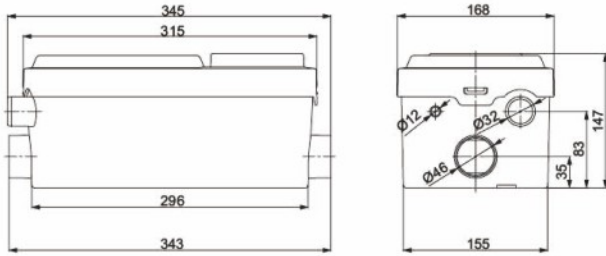

WL450A


SPECIFICATION

|                    |                |
|--------------------|----------------|
| Voltage            | 220V-240V 50HZ |
| Power consumption  | 450W           |
| Insulation Class   | F              |
| Speed              | 2850RPM        |
| Noise Level        | < 70db         |
| Enclosure Class    | IP55           |
| Sewage height(ON)  | 75mm           |
| Sewage height(OFF) | 35mm           |
| Max Flow           | 125(L/min)     |
| Max Lift           | 8M             |

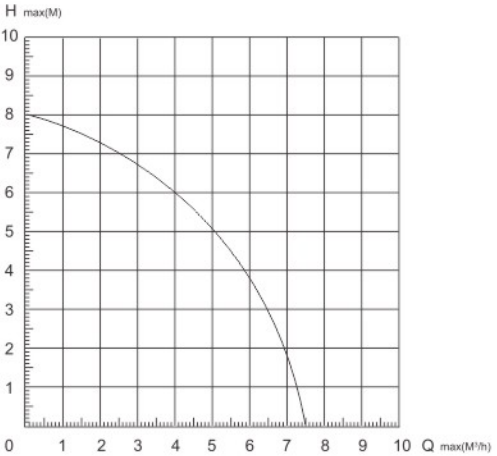

PACKAGE

|             |                    |
|-------------|--------------------|
| QTY/CTN     | 1 PCS/CTN          |
| G.W/N.W.    | 6.8 / 5.8 KGS      |
| CARTON SIZE | 46.3 X 21.2 X 35CM |
| 20GP        | 900 PCS            |
| 40GP        | 1878 PCS           |
| 40HQ        | 2165 PCS           |

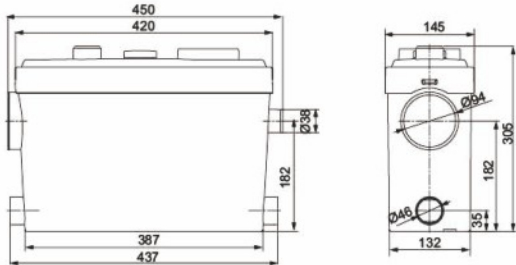


EUROPEAN TYPE




SPECIFICATION

|                    |                |
|--------------------|----------------|
| Voltage            | 220V-240V 50HZ |
| Power consumption  | 450W           |
| Insulation Class   | F              |
| Speed              | 2850RPM        |
| Noise Level        | < 70db         |
| Enclosure Class    | IP55           |
| Sewage height(ON)  | 80mm           |
| Sewage height(OFF) | 30mm           |
| Max Flow           | 125(L/min)     |
| Max Lift           | 8M             |

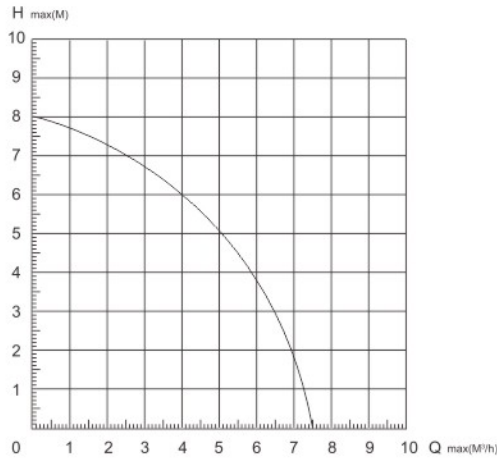


PACKAGE

|             |                    |
|-------------|--------------------|
| QTY/CTN     | 1 PCS/CTN          |
| G.W/N.W.    | 6 / 5.2 KGS        |
| CARTON SIZE | 28.5 X 23.1 X 35CM |
| 20GP        | 1330 PCS           |
| 40GP        | 2914 PCS           |
| 40HQ        | 3282 PCS           |

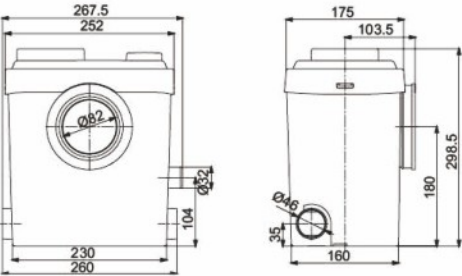


SPECIFICATION

|                    |                |
|--------------------|----------------|
| Voltage            | 220V-240V 50HZ |
| Power consumption  | 550W           |
| Insulation Class   | F              |
| Speed              | 2850RPM        |
| Noise Level        | < 70db         |
| Enclosure Class    | IP55           |
| Sewage height(ON)  | 65mm           |
| Sewage height(OFF) | 35mm           |
| Max Flow           | 150(L/min)     |
| Max Lift           | 9.5M           |
| Max Temperature    | 90°            |

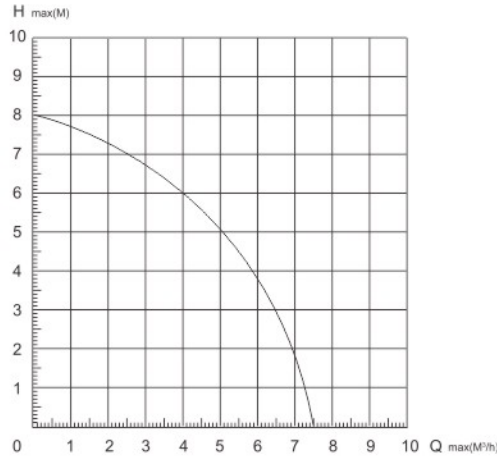

PACKAGE

|             |                      |
|-------------|----------------------|
| QTY/CTN     | 1 PCS/CTN            |
| G.W/N.W.    | 8.5 / 7.5KGS         |
| CARTON SIZE | 46.2 X 25.4 X 35.1CM |
| 20GP        | 756 PCS              |
| 40GP        | 1556 PCS             |
| 40HQ        | 1765 PCS             |

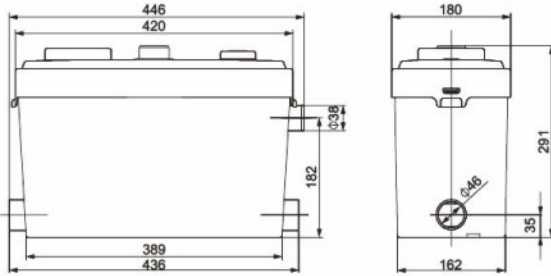


EUROPEAN TYPE




SPECIFICATION

|                    |                |
|--------------------|----------------|
| Voltage            | 220V-240V 50HZ |
| Power consumption  | 600W           |
| Insulation Class   | F              |
| Speed              | 2850RPM        |
| Noise Level        | < 70db         |
| Enclosure Class    | IP55           |
| Sewage height(ON)  | 65mm           |
| Sewage height(OFF) | 35mm           |
| Max Flow           | 150(L/min)     |
| Max Lift           | 9.5M           |

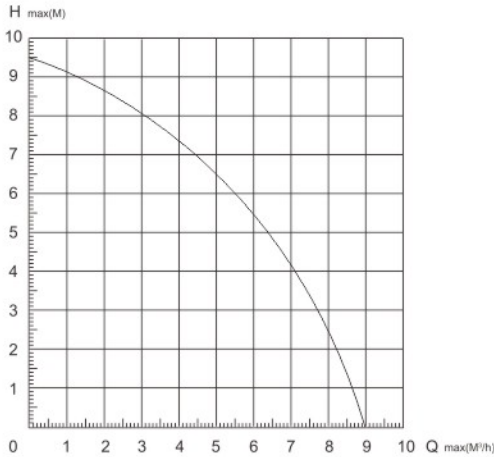


PACKAGE

|             |                      |
|-------------|----------------------|
| QTY/CTN     | 1 PCS/CTN            |
| G.W/N.W.    | 7.5 / 6.5 KGS        |
| CARTON SIZE | 46.2 X 25.4 X 35.1CM |
| 20GP        | 756 PCS              |
| 40GP        | 1556 PCS             |
| 40HQ        | 1765 PCS             |

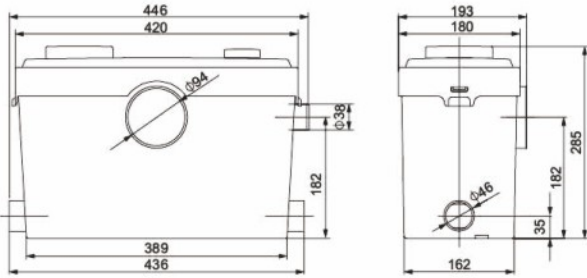


SPECIFICATION

|                    |                |
|--------------------|----------------|
| Voltage            | 220V-240V 50HZ |
| Power consumption  | 600W           |
| Insulation Class   | F              |
| Speed              | 2850RPM        |
| Noise Level        | < 70db         |
| Enclosure Class    | IP55           |
| Sewage height(ON)  | 65mm           |
| Sewage height(OFF) | 35mm           |
| Max Flow           | 150(L/min)     |
| Max Lift           | 9.5M           |

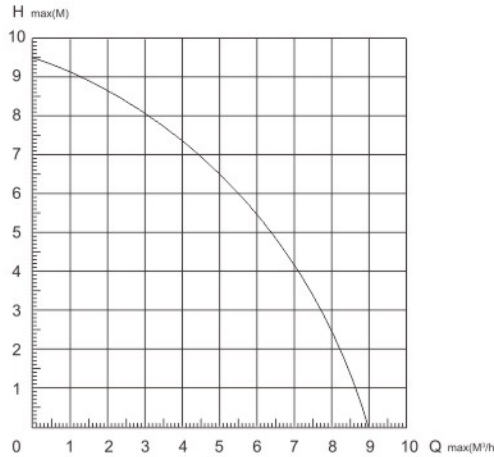

PACKAGE

|             |                      |
|-------------|----------------------|
| QTY/CTN     | 1 PCS/CTN            |
| G.W/N.W.    | 7.5 / 6.5 KGS        |
| CARTON SIZE | 46.2 X 25.4 X 35.1CM |
| 20GP        | 756 PCS              |
| 40GP        | 1556 PCS             |
| 40HQ        | 1765 PCS             |

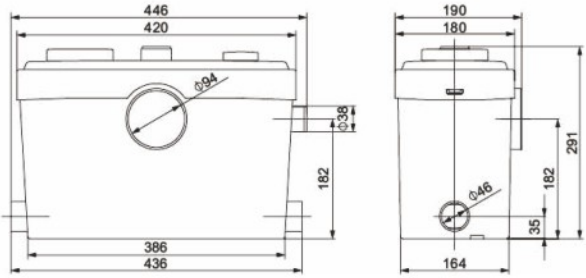


EUROPEAN TYPE




SPECIFICATION

|                    |                |
|--------------------|----------------|
| Voltage            | 220V-240V 50HZ |
| Power consumption  | 600W           |
| Insulation Class   | F              |
| Speed              | 2850RPM        |
| Noise Level        | < 70db         |
| Enclosure Class    | IP55           |
| Sewage height(ON)  | 65mm           |
| Sewage height(OFF) | 35mm           |
| Max Flow           | 150(L/min)     |
| Max Lift           | 9.5M           |

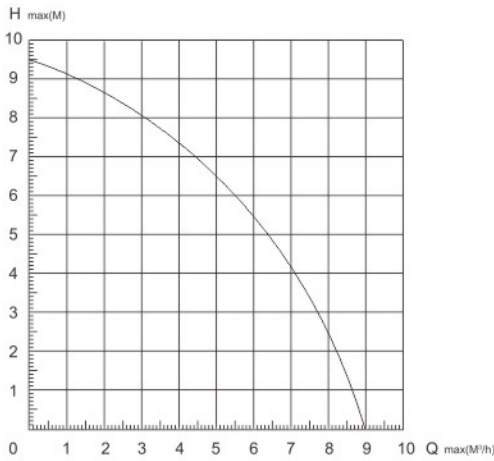


PACKAGE

|             |                      |
|-------------|----------------------|
| QTY/CTN     | 1 PCS/CTN            |
| G.W/N.W.    | 7.5 / 6.5 KGS        |
| CARTON SIZE | 46.2 X 25.4 X 35.1CM |
| 20GP        | 756 PCS              |
| 40GP        | 1556 PCS             |
| 40HQ        | 1765 PCS             |

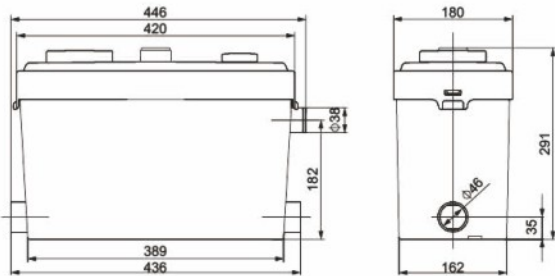


SPECIFICATION

|                    |                |
|--------------------|----------------|
| Voltage            | 220V-240V 50HZ |
| Power consumption  | 750W           |
| Insulation Class   | F              |
| Speed              | 2850RPM        |
| Noise Level        | < 70db         |
| Enclosure Class    | IP55           |
| Sewage height(ON)  | 65mm           |
| Sewage height(OFF) | 35mm           |
| Max Flow           | 165(L/min)     |
| Max Lift           | 11M            |

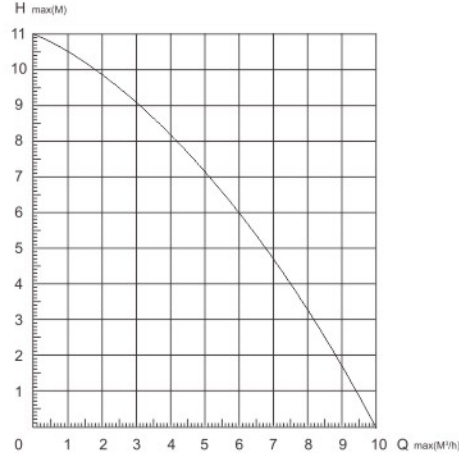

PACKAGE

|             |                      |
|-------------|----------------------|
| QTY/CTN     | 1 PCS/CTN            |
| G.W/N.W.    | 7.6 / 6.6 KGS        |
| CARTON SIZE | 46.2 X 25.4 X 35.1CM |
| 20GP        | 756 PCS              |
| 40GP        | 1556 PCS             |
| 40HQ        | 1765 PCS             |

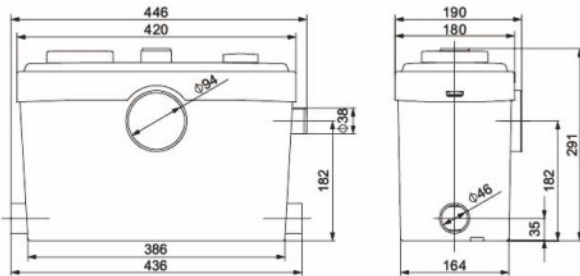


EUROPEAN TYPE




SPECIFICATION

|                    |           |
|--------------------|-----------|
| Voltage            | 110V 60HZ |
| Power consumption  | 300W      |
| Insulation Class   | F         |
| Speed              | 3450RPM   |
| Noise Level        | < 70db    |
| Enclosure Class    | IP54      |
| Sewage height(ON)  | 55mm      |
| Sewage height(OFF) | 25mm      |
| Max Flow           | 85(L/min) |
| Max Lift           | 6M        |

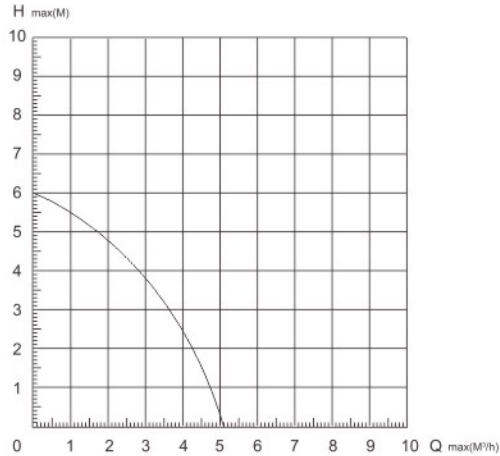


PACKAGE

|             |                |
|-------------|----------------|
| QTY/CTN     | 1 PCS/CTN      |
| G.W/N.W.    | 4.9/4 KGS      |
| CARTON SIZE | 36 X 24 X 20CM |
| 20GP        | 1766 PCS       |
| 40GP        | 3656 PCS       |
| 40HQ        | 4127 PCS       |

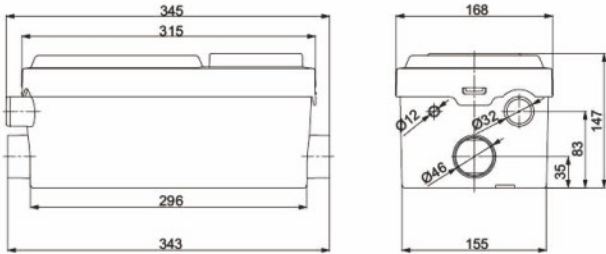


SPECIFICATION

|                    |            |
|--------------------|------------|
| Voltage            | 110V 60HZ  |
| Power consumption  | 450W       |
| Insulation Class   | F          |
| Speed              | 3450RPM    |
| Noise Level        | < 70db     |
| Enclosure Class    | IP55       |
| Sewage height(ON)  | 75mm       |
| Sewage height(OFF) | 35mm       |
| Max Flow           | 115(L/min) |
| Max Lift           | 8M         |

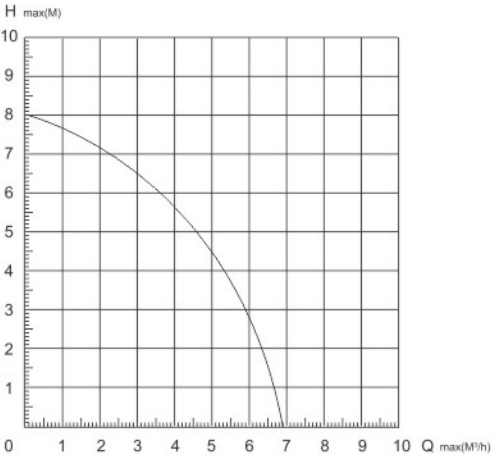

PACKAGE

|             |                    |
|-------------|--------------------|
| QTY/CTN     | 1 PCS/CTN          |
| G.W/N.W.    | 6.8 / 5.8 KGS      |
| CARTON SIZE | 46.3 X 21.2 X 35CM |
| 20GP        | 900 PCS            |
| 40GP        | 1878 PCS           |
| 40HQ        | 2165 PCS           |

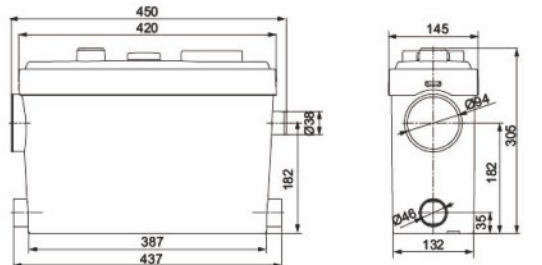


AMERICA TYPE




SPECIFICATION

|                    |            |
|--------------------|------------|
| Voltage            | 110V 60HZ  |
| Power consumption  | 450W       |
| Insulation Class   | F          |
| Speed              | 3450RPM    |
| Noise Level        | < 70db     |
| Enclosure Class    | IP55       |
| Sewage height(ON)  | 80mm       |
| Sewage height(OFF) | 30mm       |
| Max Flow           | 115(L/min) |
| Max Lift           | 8M         |

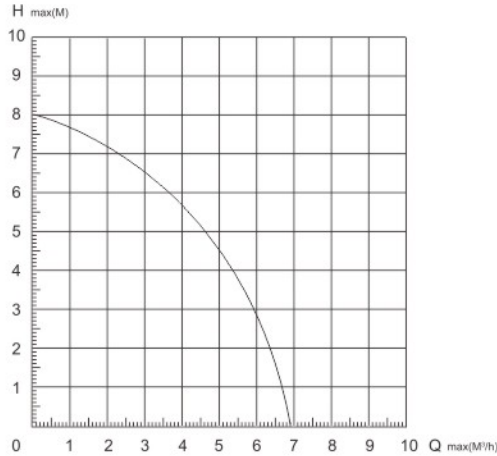


PACKAGE

|             |                    |
|-------------|--------------------|
| QTY/CTN     | 1 PCS/CTN          |
| G.W/N.W.    | 6 / 5.2 KGS        |
| CARTON SIZE | 28.5 X 23.1 X 35CM |
| 20GP        | 1330 PCS           |
| 40GP        | 2914 PCS           |
| 40HQ        | 3282 PCS           |

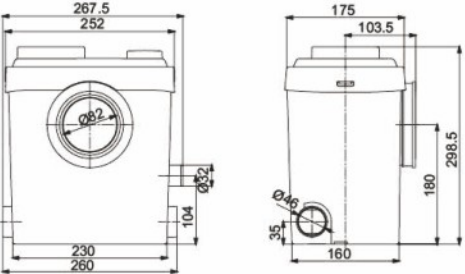


SPECIFICATION

|                    |            |
|--------------------|------------|
| Voltage            | 110V 60HZ  |
| Power consumption  | 600W       |
| Insulation Class   | F          |
| Speed              | 3450RPM    |
| Noise Level        | < 70db     |
| Enclosure Class    | IP55       |
| Sewage height(ON)  | 65mm       |
| Sewage height(OFF) | 35mm       |
| Max Flow           | 130(L/min) |
| Max Lift           | 9M         |

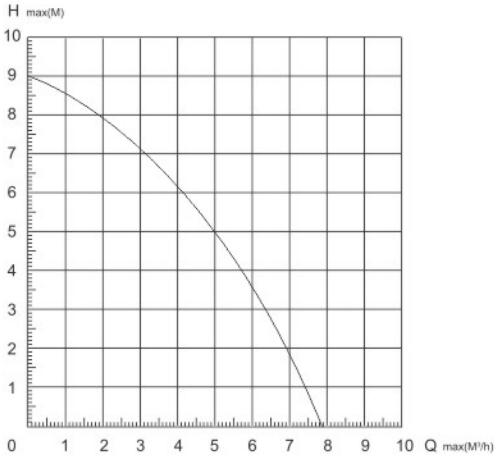

PACKAGE

|             |                      |
|-------------|----------------------|
| QTY/CTN     | 1 PCS/CTN            |
| G.W/N.W.    | 7.5 / 6.5 KGS        |
| CARTON SIZE | 46.2 X 25.4 X 35.1CM |
| 20GP        | 756 PCS              |
| 40GP        | 1556 PCS             |
| 40HQ        | 1765 PCS             |

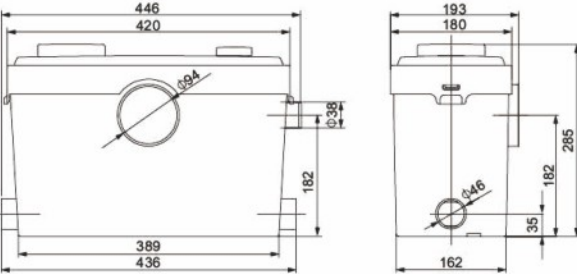

AMERICA TYPE





SPECIFICATION

|                    |            |
|--------------------|------------|
| Voltage            | 110V 60HZ  |
| Power consumption  | 600W       |
| Insulation Class   | F          |
| Speed              | 3450RPM    |
| Noise Level        | < 70db     |
| Enclosure Class    | IP55       |
| Sewage height(ON)  | 65mm       |
| Sewage height(OFF) | 35mm       |
| Max Flow           | 130(L/min) |
| Max Lift           | 9M         |

PACKAGE

|             |                      |
|-------------|----------------------|
| QTY/CTN     | 1 PCS/CTN            |
| G.W/N.W.    | 7.5 / 6.5 KGS        |
| CARTON SIZE | 46.2 X 25.4 X 35.1CM |
| 20GP        | 756 PCS              |
| 40GP        | 1556 PCS             |
| 40HQ        | 1765 PCS             |

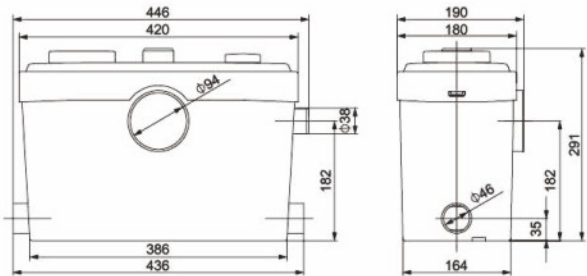
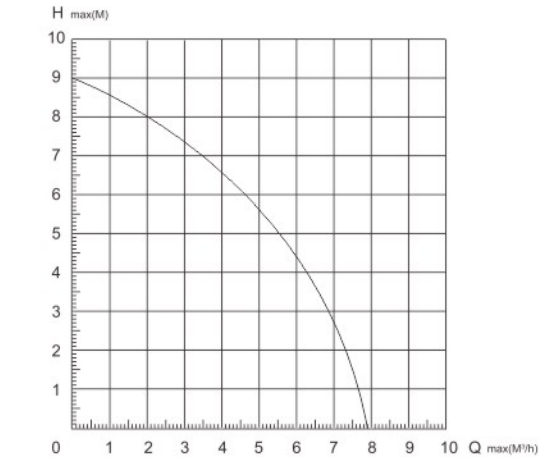


SPECIFICATION

|                    |            |
|--------------------|------------|
| Voltage            | 110V 60HZ  |
| Power consumption  | 600W       |
| Insulation Class   | F          |
| Speed              | 3450RPM    |
| Noise Level        | < 70db     |
| Enclosure Class    | IP55       |
| Sewage height(ON)  | 65mm       |
| Sewage height(OFF) | 35mm       |
| Max Flow           | 130(L/min) |
| Max Lift           | 9M         |

PACKAGE

|             |                      |
|-------------|----------------------|
| QTY/CTN     | 1 PCS/CTN            |
| G.W/N.W.    | 7.5 / 6.5 KGS        |
| CARTON SIZE | 46.2 X 25.4 X 35.1CM |
| 20GP        | 756 PCS              |
| 40GP        | 1556 PCS             |
| 40HQ        | 1765 PCS             |

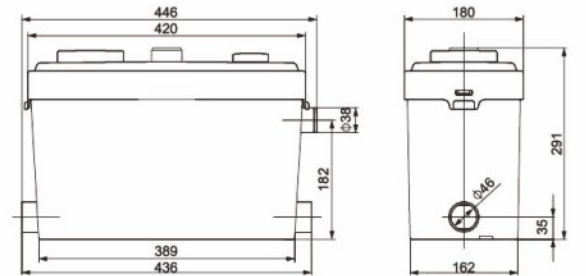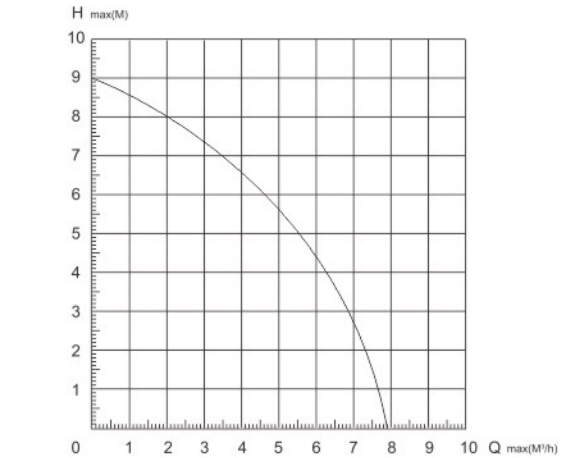


AMERICA TYPE



WL750B


SPECIFICATION

|                    |            |
|--------------------|------------|
| Voltage            | 110V 60HZ  |
| Power consumption  | 750W       |
| Insulation Class   | F          |
| Speed              | 3450RPM    |
| Noise Level        | < 70db     |
| Enclosure Class    | IP55       |
| Sewage height(ON)  | 65mm       |
| Sewage height(OFF) | 35mm       |
| Max Flow           | 150(L/min) |
| Max Lift           | 11M        |

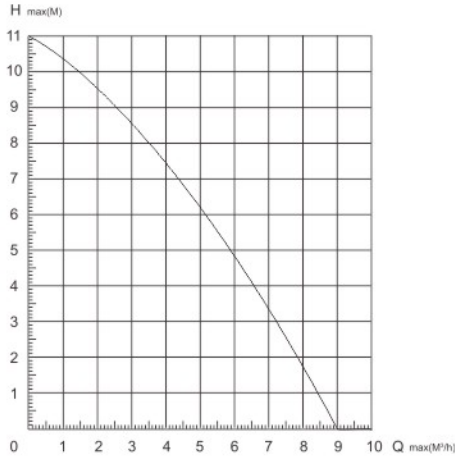

PACKAGE


|             |                      |
|-------------|----------------------|
| QTY/CTN     | 1 PCS/CTN            |
| G.W/N.W.    | 7.6 / 6.6 KGS        |
| CARTON SIZE | 46.2 X 25.4 X 35.1CM |
| 20GP        | 756 PCS              |
| 40GP        | 1556 PCS             |
| 40HQ        | 1765 PCS             |

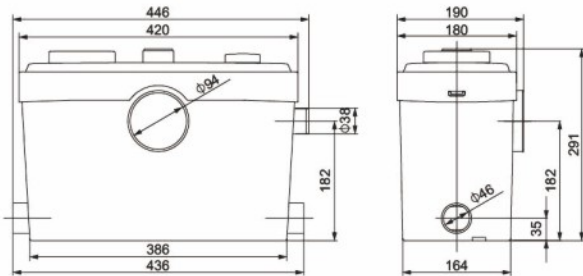

WL900B


SPECIFICATION

|                    |            |
|--------------------|------------|
| Voltage            | 110V 60HZ  |
| Power consumption  | 900W       |
| Insulation Class   | F          |
| Speed              | 3450RPM    |
| Noise Level        | < 70db     |
| Enclosure Class    | IP55       |
| Sewage height(ON)  | 65mm       |
| Sewage height(OFF) | 35mm       |
| Max Flow           | 170(L/min) |
| Max Lift           | 12 M       |

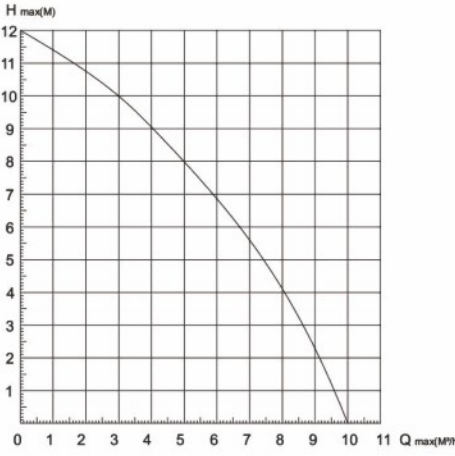

PACKAGE


|             |                      |
|-------------|----------------------|
| QTY/CTN     | 1 PCS/CTN            |
| G.W/N.W.    | 7.5 / 6.5 KGS        |
| CARTON SIZE | 46.2 X 25.4 X 35.1CM |
| 20GP        | 756 PCS              |
| 40GP        | 1556 PCS             |
| 40HQ        | 1765 PCS             |

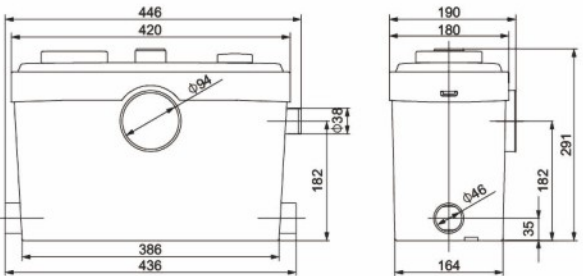

AMERICA TYPE




INSTALLATION DIAGRAM

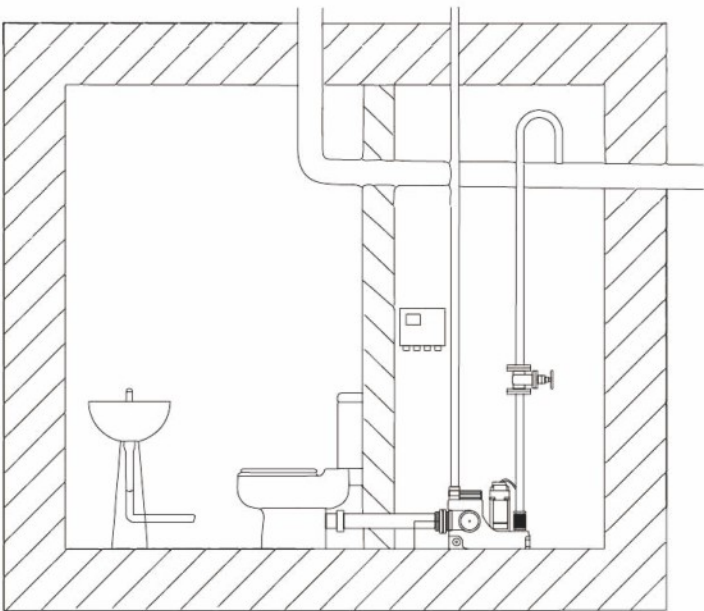


SPECIFICATION

|                                      |                |      |             |      |
|--------------------------------------|----------------|------|-------------|------|
| Model                                | 25 Series      |      |             |      |
| Pump Unit                            | Single         |      |             |      |
| Dimension (mm)                       | 320x565x434    |      |             |      |
| Single phase                         | 220V / 50HZ    |      | 380V / 50HZ |      |
| Input P1 (W)                         | 750            | 1100 | 750         | 1100 |
| Max. Flow (m³/h)                     | 27             | 32   | 27          | 32   |
| Max. Head (m)                        | 11             | 13   | 11          | 13   |
| Control type                         | Pressure/float |      |             |      |
| Class of protection-pump station     | IP68           |      |             |      |
| Motor insulation class               | F              |      |             |      |
| Maximum start-stop frequency of pump | 60 pcs/h       |      |             |      |
| Free passage (mm)                    | 35             |      |             |      |
| Tank capacity (L)                    | 25             |      |             |      |
| Start level (cm)                     | 15             |      |             |      |
| Stop level (cm)                      | 9              |      |             |      |
| Dry-running noise (dB)               | < 60           |      |             |      |

DIMENSION

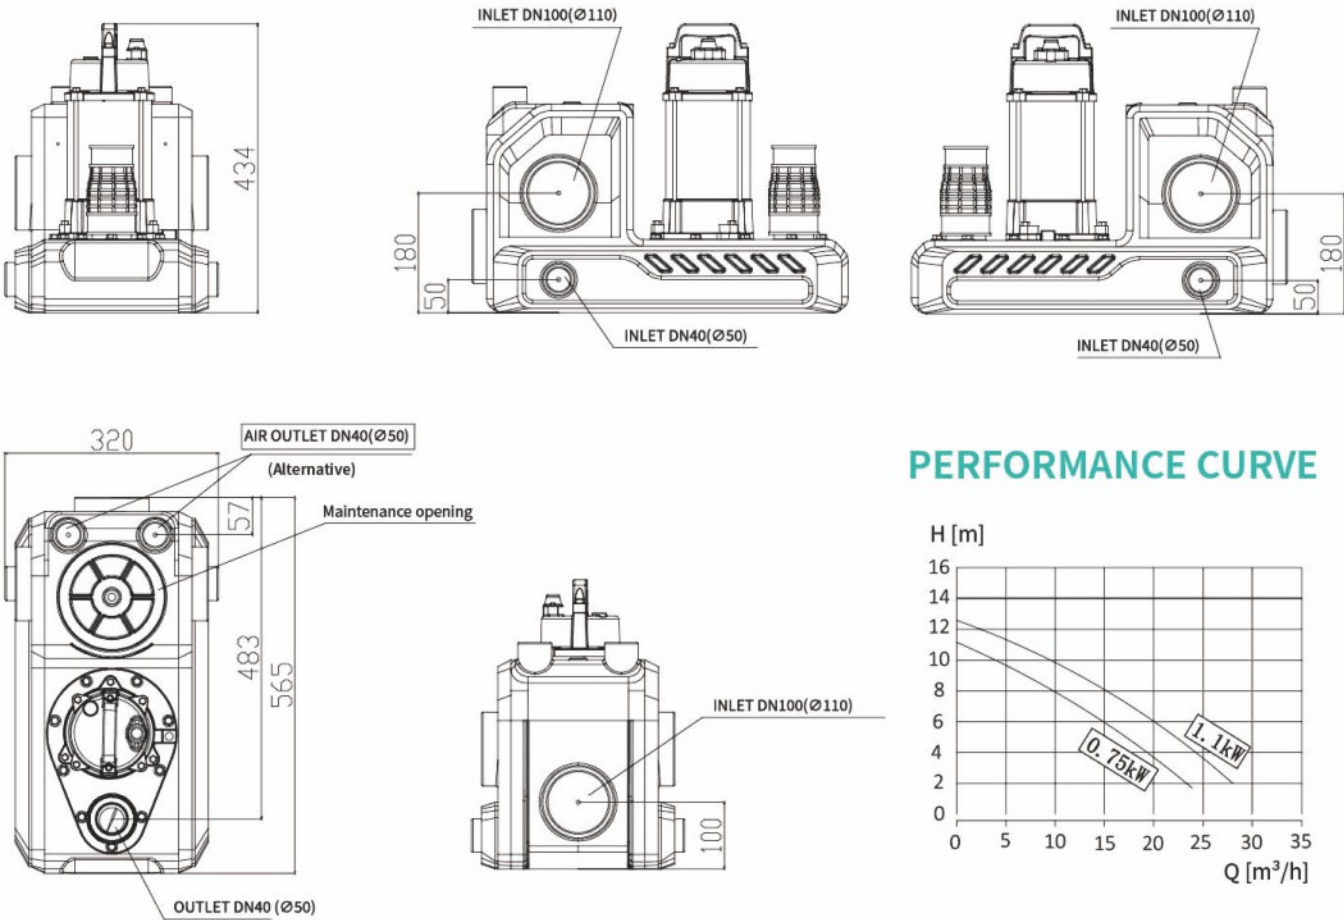

PERFORMANCE CURVE

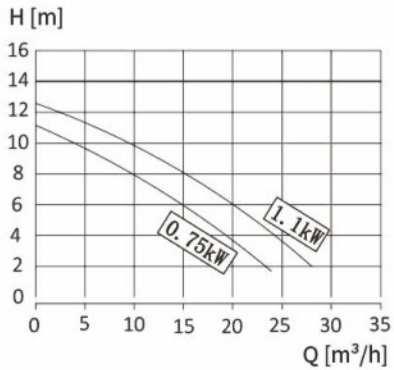





## SPECIFICATION

|                                      |                           |      |             |      |
|--------------------------------------|---------------------------|------|-------------|------|
| Model                                | 50 Series                 |      |             |      |
| Pump Unit                            | Double                    |      |             |      |
| Dimension (mm)                       | 600x500x434               |      |             |      |
| Single phase                         | 220V / 50HZ               |      | 380V / 50HZ |      |
| Input P1 (W)                         | 750                       | 1100 | 750         | 1100 |
| Max. Flow (m³/h)                     | 27                        | 32   | 27          | 32   |
| Max. Head (m)                        | 11                        | 13   | 11          | 13   |
| Control type                         | Pressure/float            |      |             |      |
| Class of protection - pump station   | IP68                      |      |             |      |
| Motor insulation class               | F                         |      |             |      |
| Maximum start-stop frequency of pump | 60 pcs/h                  |      |             |      |
| Free passage (mm)                    | 35                        |      |             |      |
| Tank capacity (L)                    | 50                        |      |             |      |
| Start level (cm)                     | 16 (Single) / 20 (Double) |      |             |      |
| Stop level (cm)                      | 10                        |      |             |      |
| Dry-running noise (dB)               | < 60                      |      |             |      |

## INSTALLATION DIAGRAM

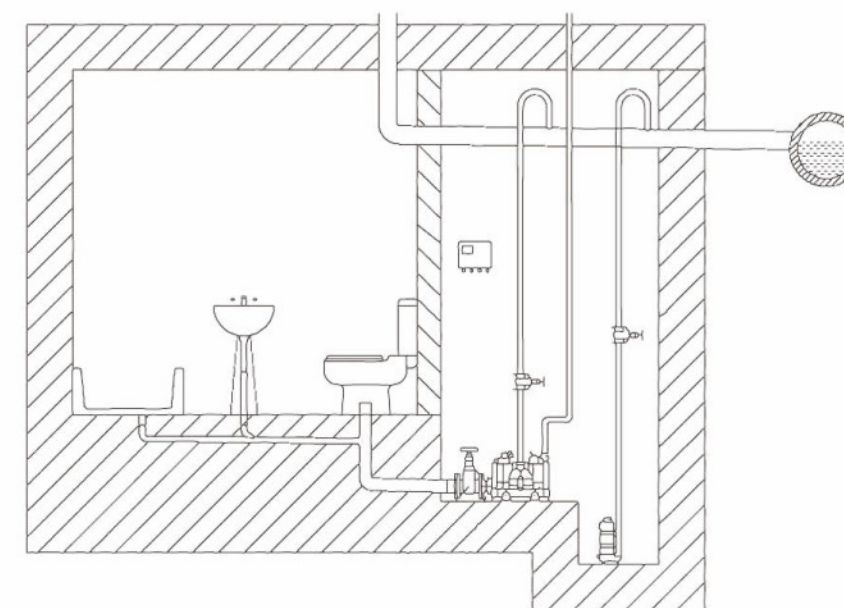

## DIMENSION

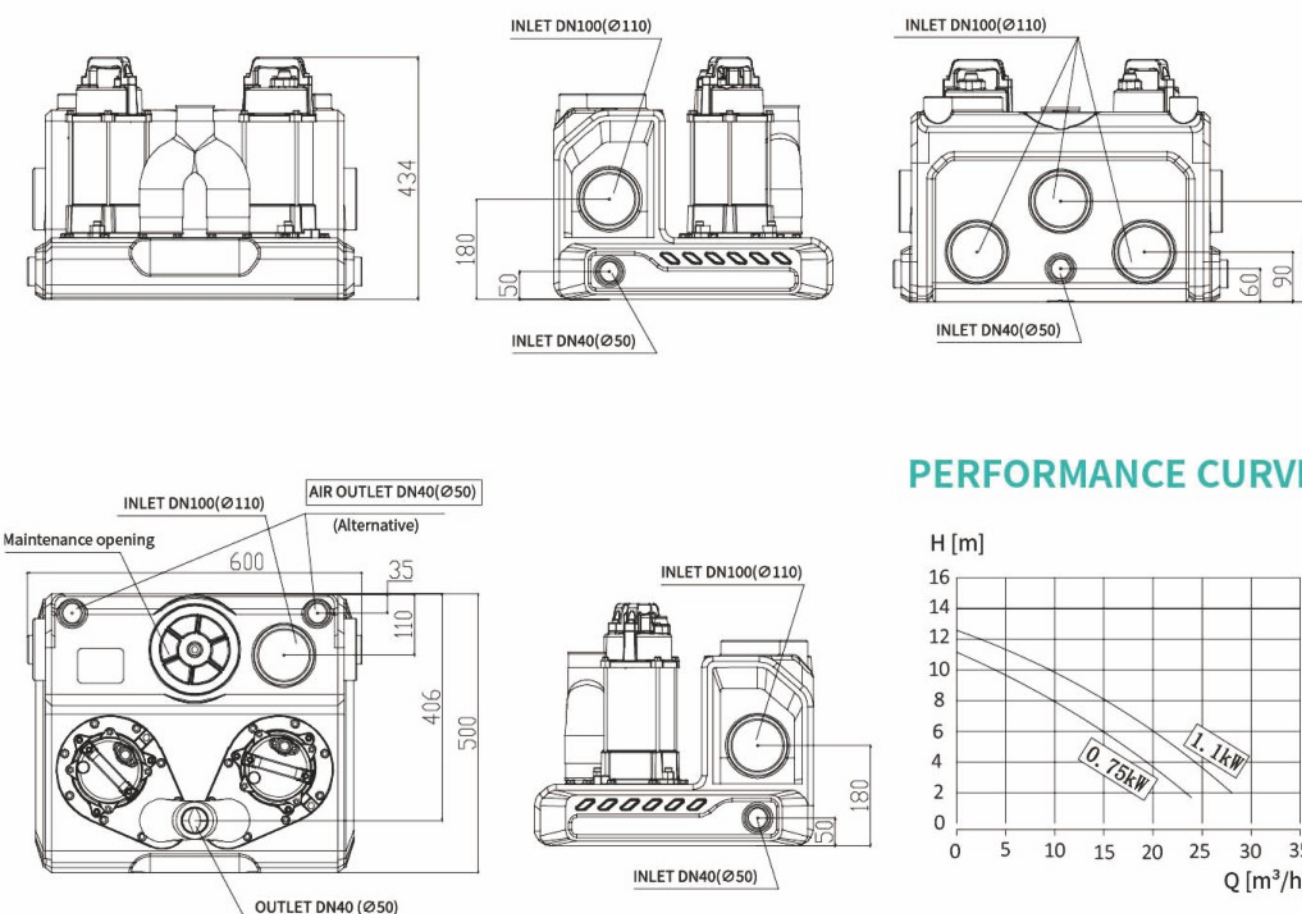





SPECIFICATION

|                                      |                |      |             |      |
|--------------------------------------|----------------|------|-------------|------|
| Model                                | 60 Series      |      |             |      |
| Pump Unit                            | Single         |      |             |      |
| Dimension (mm)                       | 540x555x439    |      |             |      |
| Single phase                         | 220V / 50HZ    |      | 380V / 50HZ |      |
| Input P1 (W)                         | 750            | 1100 | 750         | 1100 |
| Max. Flow (m³/h)                     | 27             | 32   | 27          | 32   |
| Max. Head (m)                        | 11             | 13   | 11          | 13   |
| Control type                         | Pressure/float |      |             |      |
| Class of protection-pump station     | IP68           |      |             |      |
| Motor insulation class               | F              |      |             |      |
| Maximum start-stop frequency of pump | 60 pcs/h       |      |             |      |
| Free passage (mm)                    | 50             |      |             |      |
| Tank capacity (L)                    | 60             |      |             |      |
| Start level (cm)                     | 16             |      |             |      |
| Stop level (cm)                      | 10             |      |             |      |
| Dry-running noise (dB)               | < 60           |      |             |      |


INSTALLATION DIAGRAM

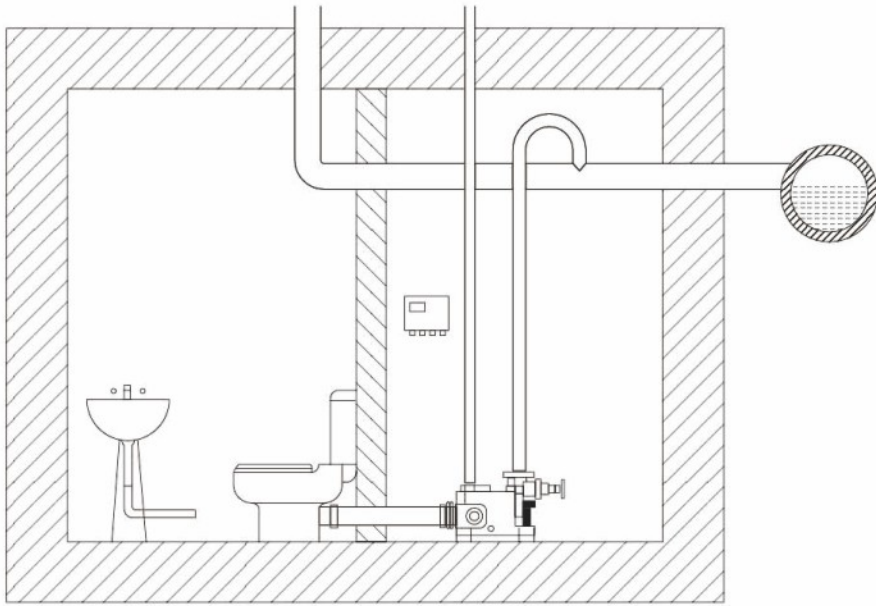

DIMENSION

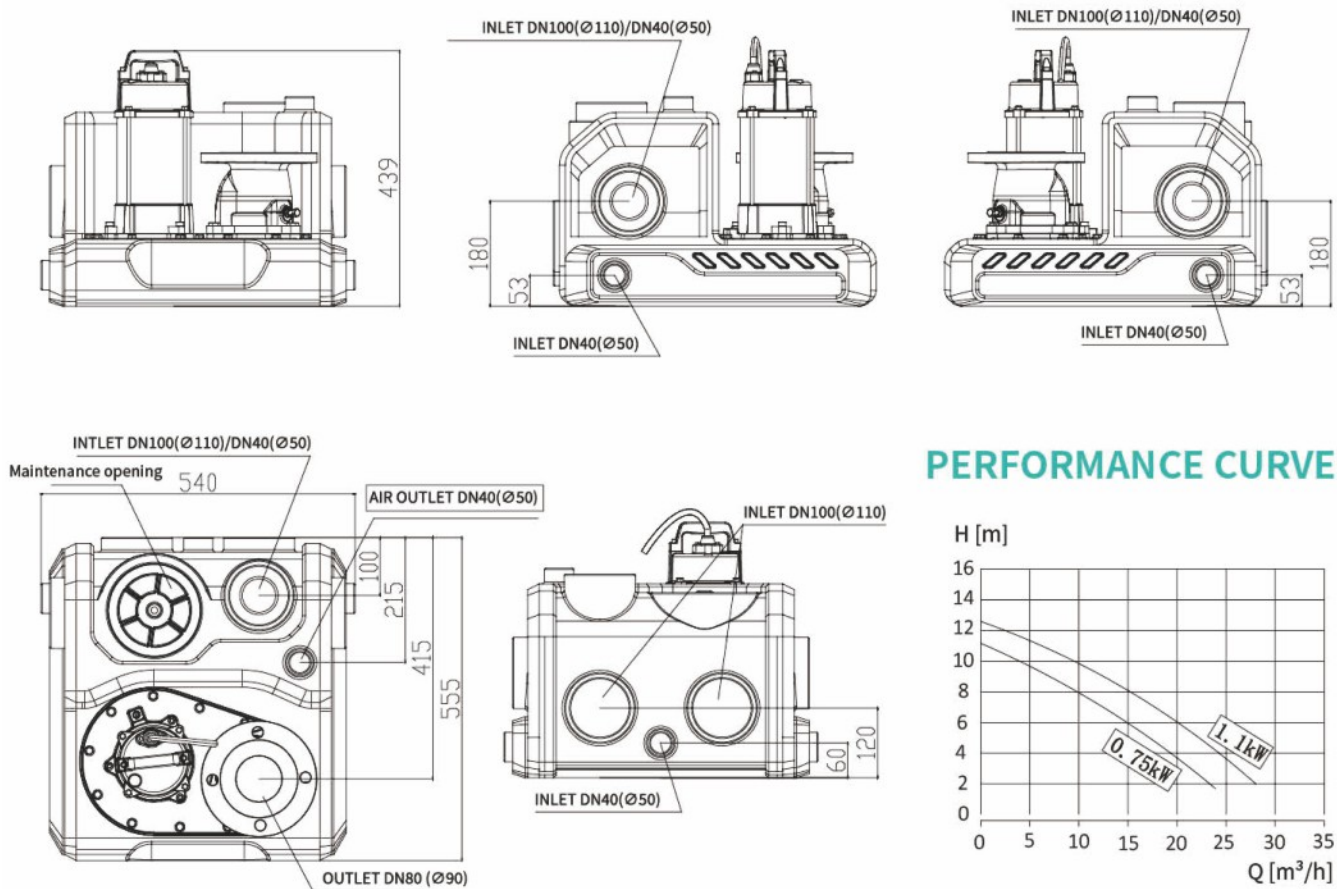


PERFORMANCE CURVE

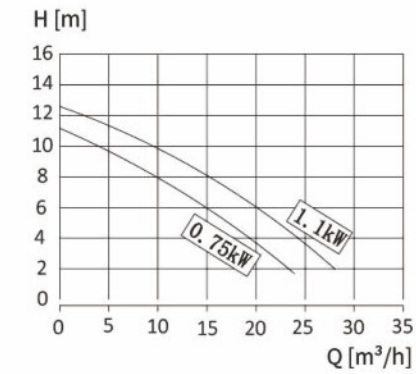




DMJ90

INSTALLATION DIAGRAM

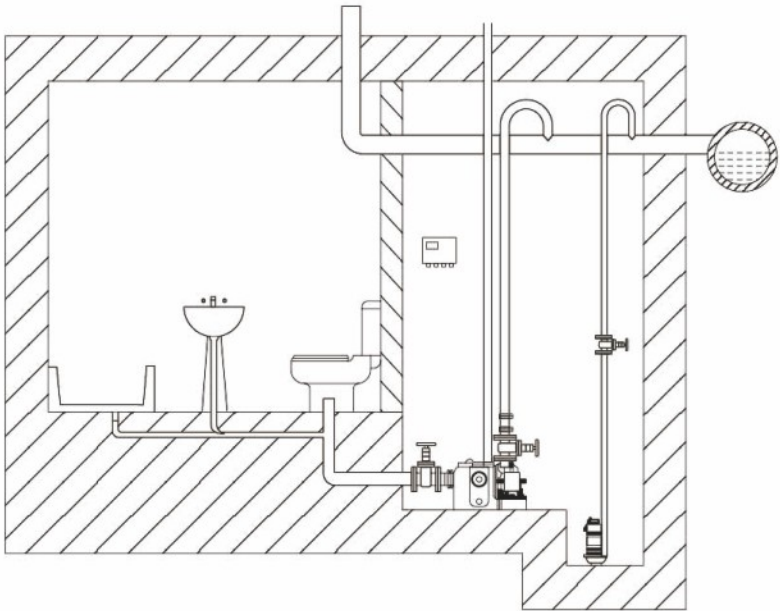

DIMENSION

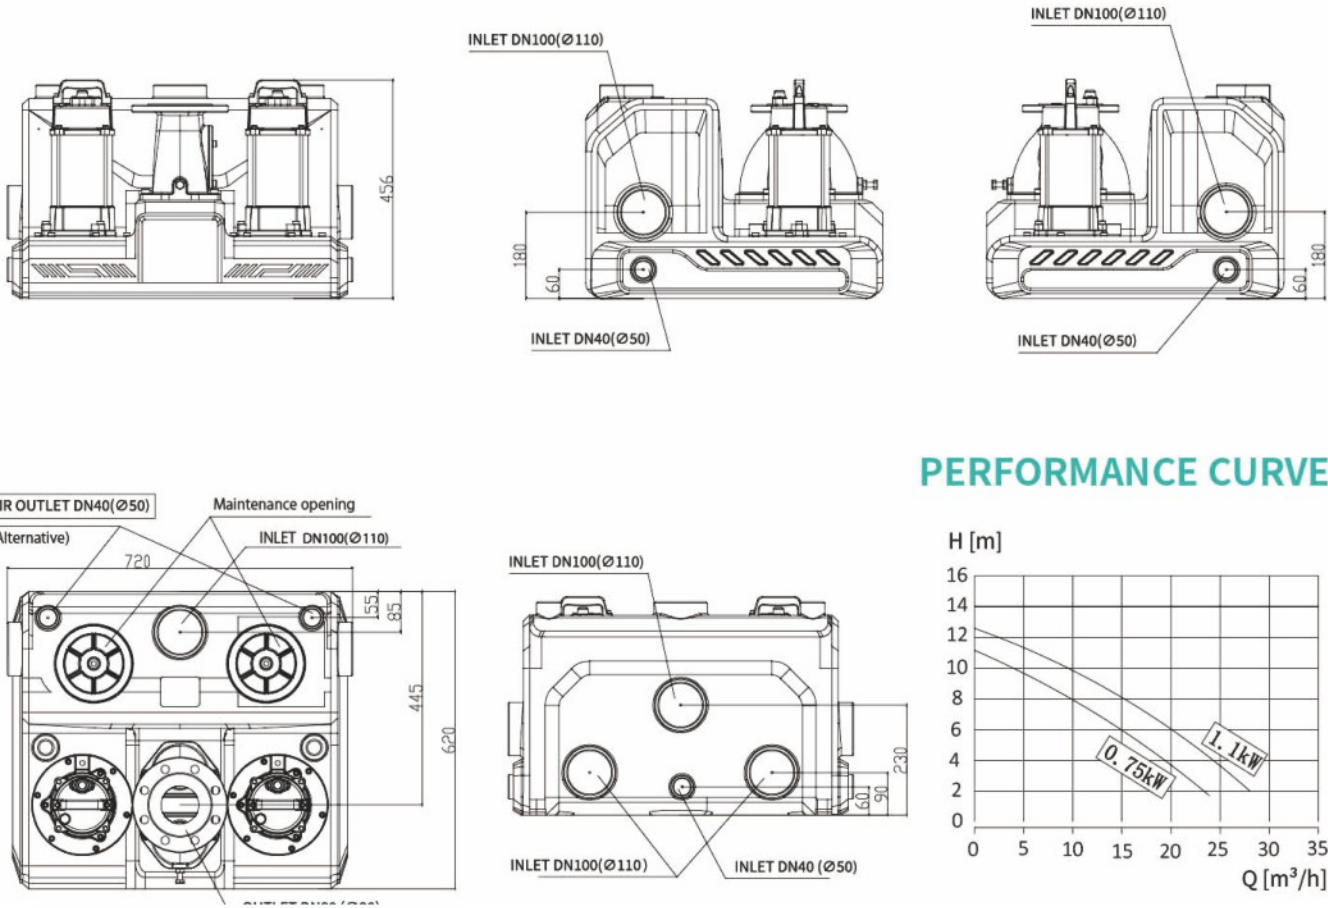

SPECIFICATION

|                                      |                           |      |             |      |
|--------------------------------------|---------------------------|------|-------------|------|
| Model                                | 90 Series                 |      |             |      |
| Pump Unit                            | Double                    |      |             |      |
| Dimension (mm)                       | 720x620x456               |      |             |      |
| Single phase                         | 220V / 50HZ               |      | 380V / 50HZ |      |
| Input P1 (W)                         | 750                       | 1100 | 750         | 1100 |
| Max. Flow (m³/h)                     | 27                        | 32   | 27          | 32   |
| Max. Head (m)                        | 11                        | 13   | 11          | 13   |
| Control type                         | Pressure/float            |      |             |      |
| Class of protection-pump station     | IP68                      |      |             |      |
| Motor insulation class               | F                         |      |             |      |
| Maximum start-stop frequency of pump | 120 pcs/h                 |      |             |      |
| Free passage (mm)                    | 50                        |      |             |      |
| Tank capacity (L)                    | 90                        |      |             |      |
| Start level (cm)                     | 16 (Single) / 20 (Double) |      |             |      |
| Stop level (cm)                      | 10                        |      |             |      |
| Dry-running noise (dB)               | < 60                      |      |             |      |




DMJ170


SPECIFICATION

|                                      |                           |      |      |             |      |      |
|--------------------------------------|---------------------------|------|------|-------------|------|------|
| Model                                | 170 Series                |      |      |             |      |      |
| Pump Unit                            | Double                    |      |      |             |      |      |
| Dimension (mm)                       | 840x535x539               |      |      |             |      |      |
| Single phase                         | 220V / 50HZ               |      |      | 380V / 50HZ |      |      |
| Input P1 (W)                         | 1500                      | 2200 | 3000 | 1500        | 2200 | 3000 |
| Max. Flow (m³/h)                     | 44                        | 53   | 63   | 44          | 53   | 63   |
| Max. Head (m)                        | 15                        | 18   | 21   | 15          | 18   | 21   |
| Control type                         | Pressure/float            |      |      |             |      |      |
| Class of protection-pump station     | IP68                      |      |      |             |      |      |
| Motor insulation class               | F                         |      |      |             |      |      |
| Maximum start-stop frequency of pump | 120 pcs/h                 |      |      |             |      |      |
| Free passage (mm)                    | 60                        |      |      |             |      |      |
| Tank capacity (L)                    | 170                       |      |      |             |      |      |
| Start level (cm)                     | 18 (Single) / 23 (Double) |      |      |             |      |      |
| Stop level (cm)                      | 11                        |      |      |             |      |      |
| Dry-running noise (dB)               | < 70                      |      |      |             |      |      |


INSTALLATION DIAGRAM

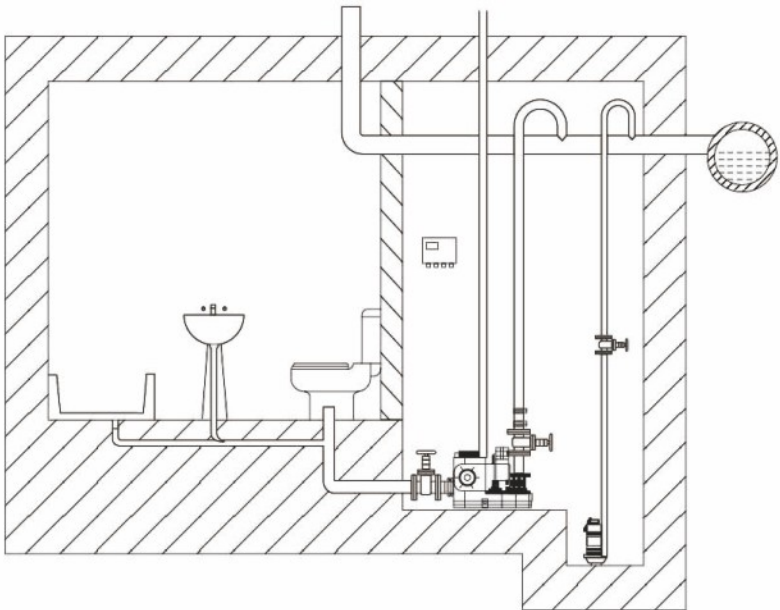

DIMENSION

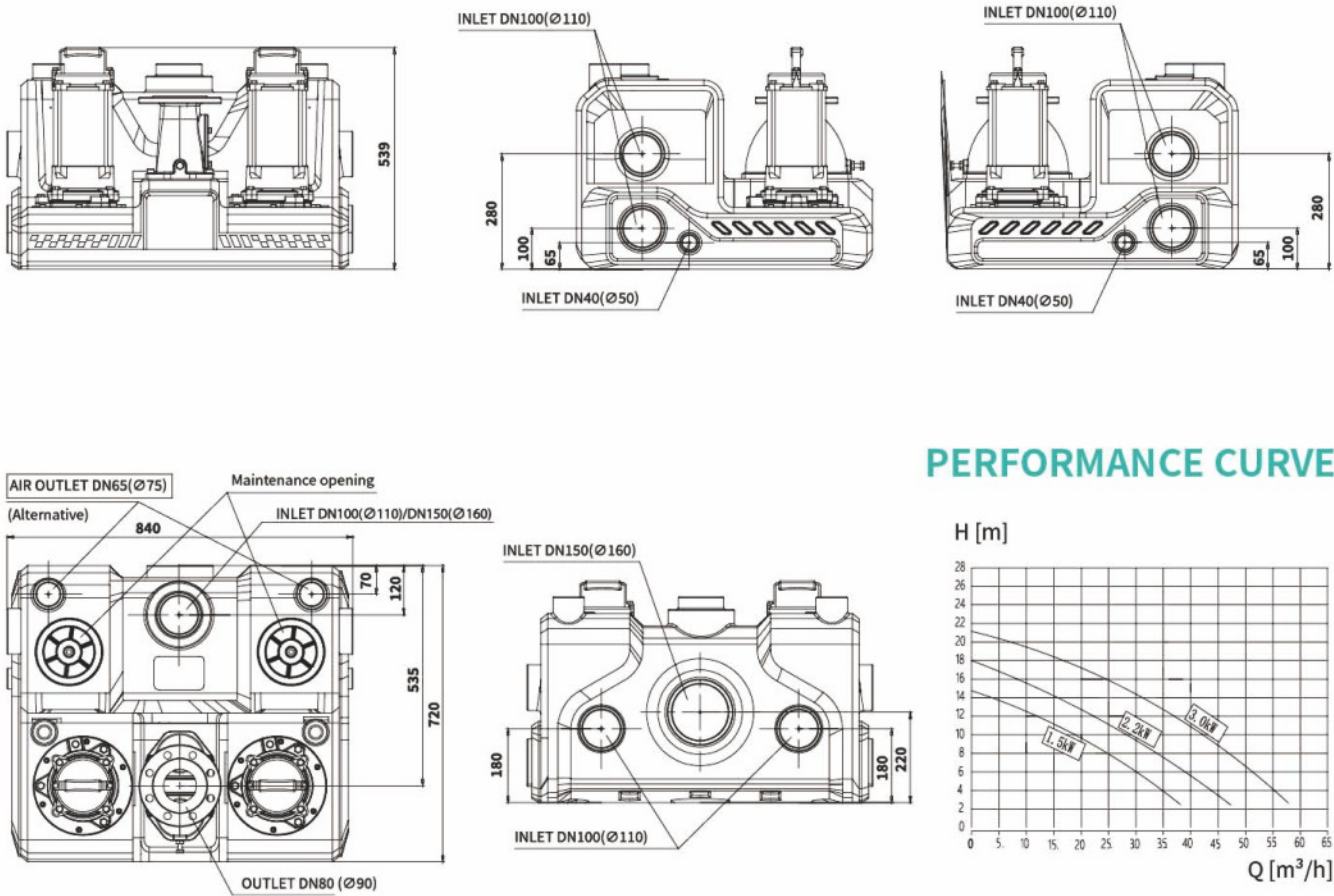

PERFORMANCE CURVE

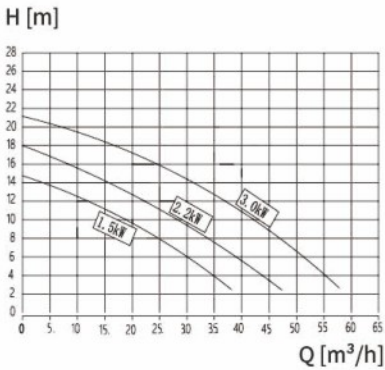





SPECIFICATION

|                                      |                           |      |      |             |      |      |
|--------------------------------------|---------------------------|------|------|-------------|------|------|
| Model                                | 460 Series                |      |      |             |      |      |
| Pump Unit                            | Double                    |      |      |             |      |      |
| Dimension (mm)                       | 1150x960x740              |      |      |             |      |      |
| Single phase                         | 220V / 50HZ               |      |      | 380V / 50HZ |      |      |
| Input P1 (W)                         | 1500                      | 2200 | 3000 | 1500        | 2200 | 3000 |
| Max. Flow (m³/h)                     | 44                        | 53   | 63   | 44          | 53   | 63   |
| Max. Head (m)                        | 15                        | 18   | 21   | 15          | 18   | 21   |
| Control type                         | Pressure/float            |      |      |             |      |      |
| Class of protection-pump station     | IP68                      |      |      |             |      |      |
| Motor insulation class               | F                         |      |      |             |      |      |
| Maximum start-stop frequency of pump | 120 pcs/h                 |      |      |             |      |      |
| Free passage (mm)                    | 60                        |      |      |             |      |      |
| Tank capacity (L)                    | 460                       |      |      |             |      |      |
| Start level (cm)                     | 30 (Single) / 35 (Double) |      |      |             |      |      |
| Stop level (cm)                      | 15                        |      |      |             |      |      |
| Dry-running noise (dB)               | < 70                      |      |      |             |      |      |


INSTALLATION DIAGRAM

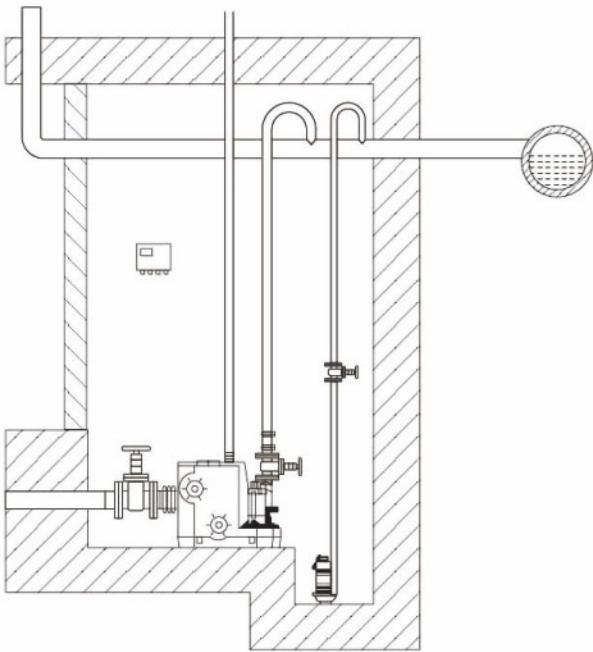

DIMENSION

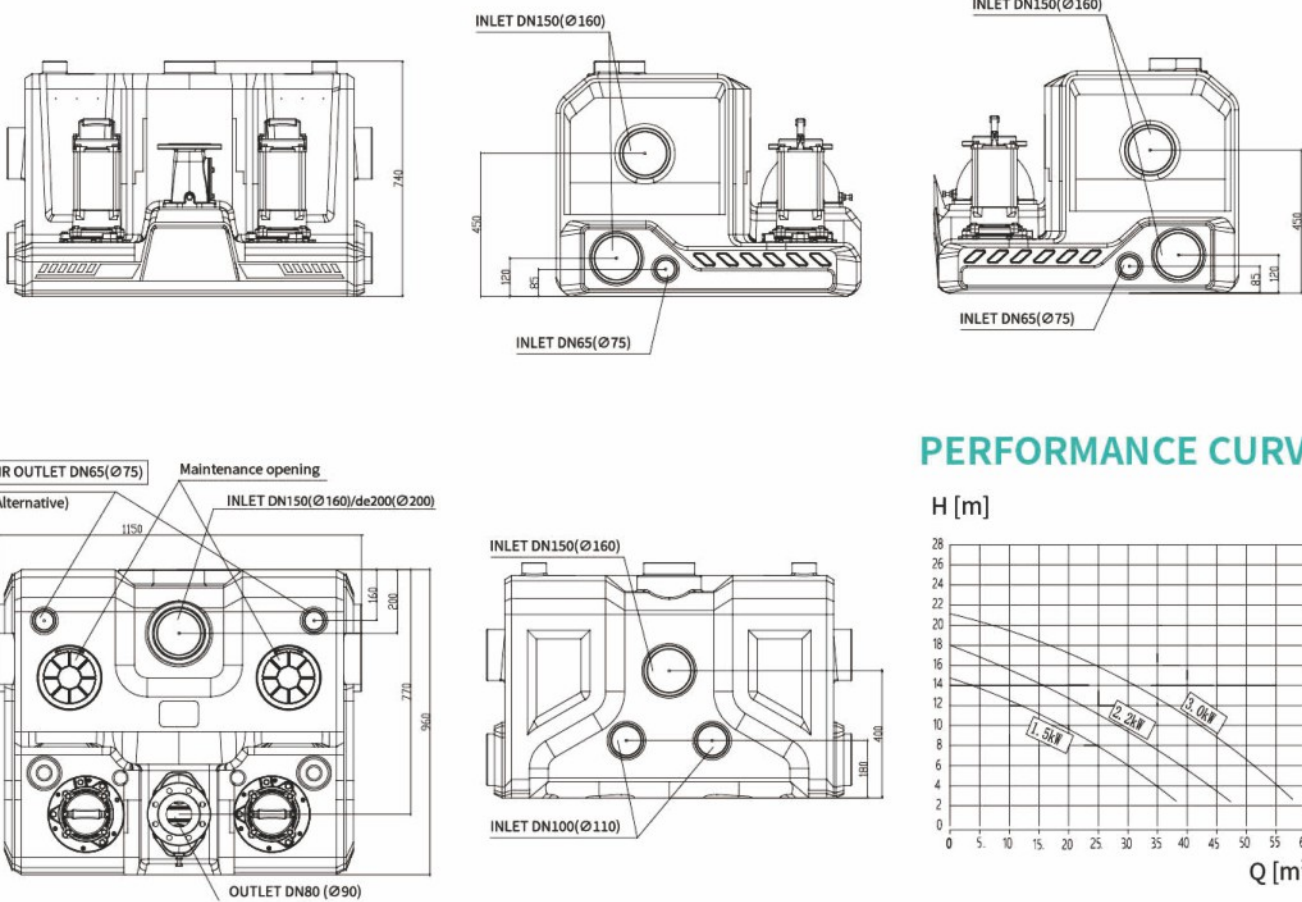

PERFORMANCE CURVE

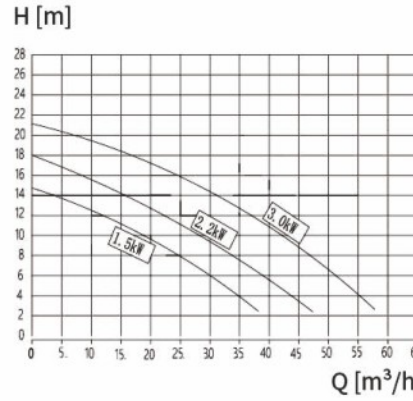


AUTOMATIC SEWAGE  
LIFTING DEVICE

| Name                                                                                | Specification                   |
|-------------------------------------------------------------------------------------|---------------------------------|
|    | 25-40mm                         |
|                                                                                     | 32-50mm                         |
|                                                                                     | 80-100mm                        |
|                                                                                     | 90-110mm                        |
|                                                                                     | 100-120mm                       |
|    | Ø 46, Ø 40mm                    |
|                                                                                     | Ø 40, Ø 40mm                    |
|    | Ø 32, Ø 40mm                    |
|                                                                                     | Ø 32, Ø 40mm<br>silicone rubber |
|  | Ø 32, Ø 40mm                    |
|  |                                 |
|  | Ø 90mm                          |
|                                                                                     | Ø 120mm                         |

EXTERNAL SEWAGE  
LIFTING STATION

| Name                                                                                | Specification                                       |
|-------------------------------------------------------------------------------------|-----------------------------------------------------|
|    | DN50                                                |
|                                                                                     | DN75                                                |
|    | 35-57mm                                             |
|                                                                                     | 60-80mm                                             |
|                                                                                     | 110-130mm                                           |
|                                                                                     | 120-140mm                                           |
|    | 98-103mm                                            |
|                                                                                     | 162-174mm                                           |
|  | 110-120mm                                           |
|                                                                                     | 110-110mm                                           |
|  | 90mm                                                |
|                                                                                     | 160mm                                               |
|  | DN80                                                |
|                                                                                     | 201 Stainless Steel<br>Screws (Matching Set) M16*60 |
|  | DN50 Internal Plug                                  |
|                                                                                     | Flange Gasket DN80                                  |


MULTINATIONAL CERTIFIED  
WIRES AND PLUGS

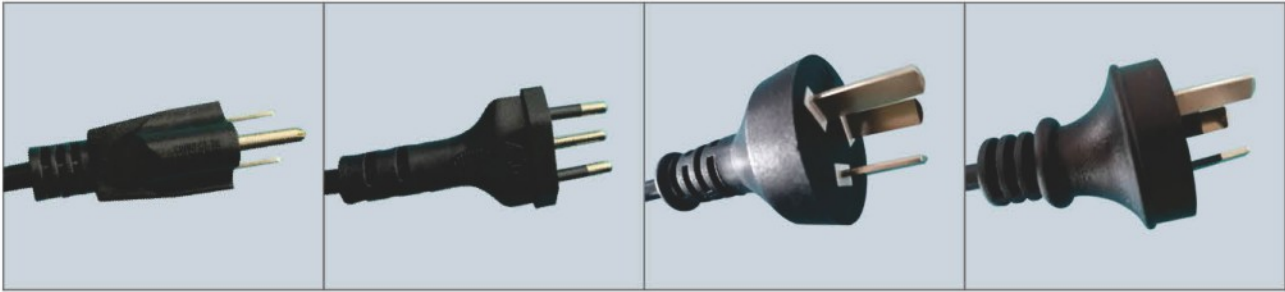


America Brazil Argentina Australia



Europe Britain Denmark

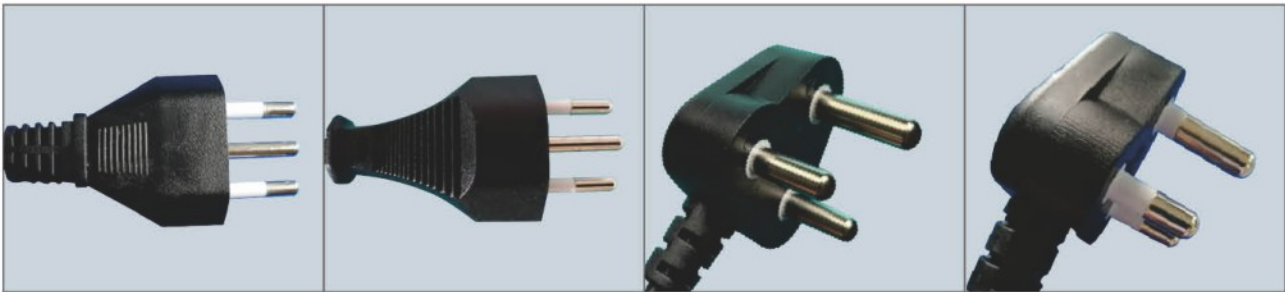

Italy Switzerland South Africa

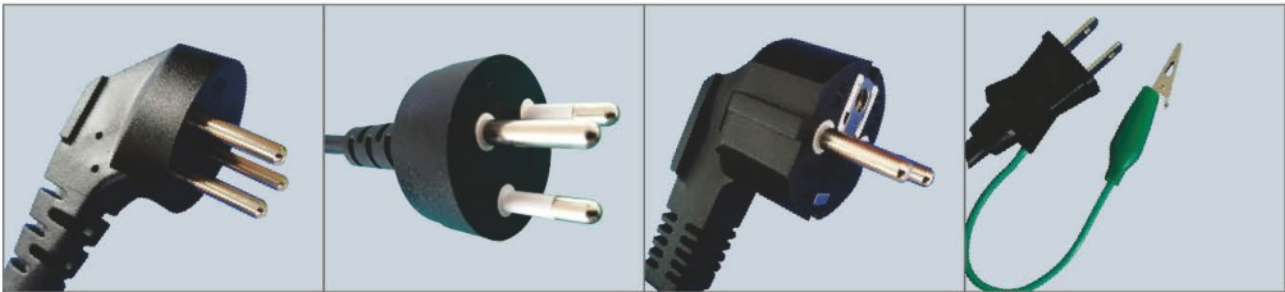

Israel Thailand South Korea Japan